

COMBINATION INSTALLATIONS




Slide-In Cooktop/ Warming Drawer

PLANNING GUIDE

WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- All appliances must be installed in accordance with the accompanying installation instructions.

All tolerances: +1/16", -0, (+1.6 mm, -0) unless otherwise stated

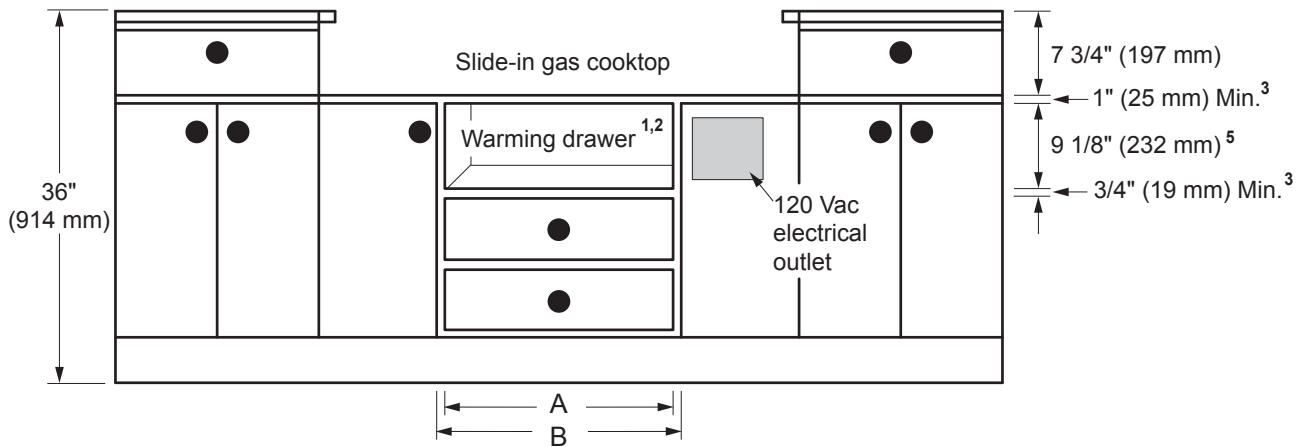

DRT/EG COOKTOP WITH WARMING DRAWER

Dacor Models	(A) Cabinet Cutout Width	(B) Min. ³ Cabinet Width
24"	22 1/2" (572 mm)	24 1/4" (616 mm)
27"	25 1/2" (648 mm)	27 1/4" (692 mm)
30"	28 1/2" (724 mm)	30 1/4" (768 mm)
36"	34 1/2" (876 mm)	36 1/4" (921 mm)

NOTES:

1. 24" (610 mm) minimum interior cabinet depth (20 1/8" for model OWD24).
2. Requires 3/4" (19 mm) support platform (flush with cutout).
3. Spacing may vary for warming drawers with a custom front panel. See warming drawer installation instructions for further details.
4. See individual appliance planning guides to determine overlays.
5. 11 15/16" (303 mm) for OWD24.
6. Spacing shown is the bare minimum required for ventilation and to prevent scraping of doors and drawers. Additional spacing may be required for appearance.
7. Model OWD24 is not approved for installation adjacent to a wall oven.