

COMBINATION INSTALLATIONS




Slide-In Cooktop/ Warming Drawers Stacked

PLANNING GUIDE

WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- All appliances must be installed in accordance with the accompanying installation instructions.

All tolerances: +1/16", -0, (+1.6 mm, -0) unless otherwise stated

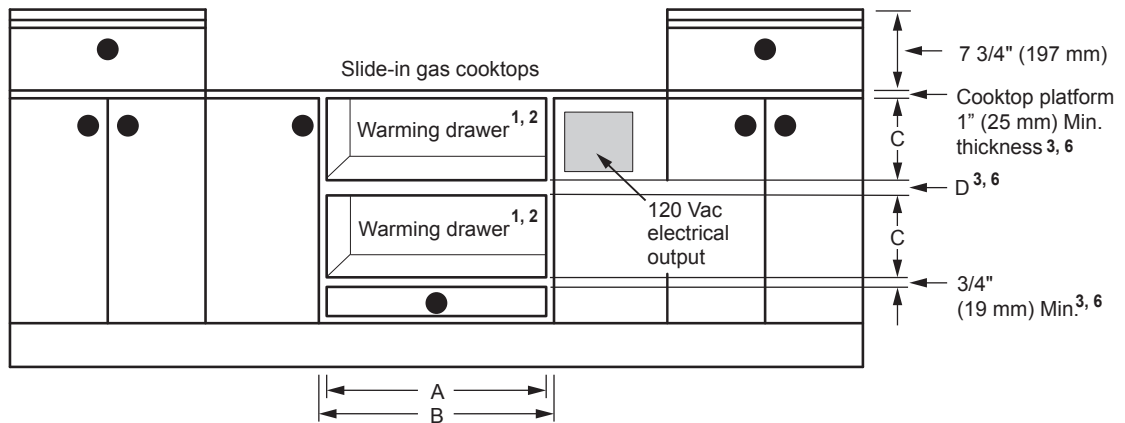

DRT/EG SERIES COOKTOP WITH WARMING DRAWERS (STACKED INSTALLATION)

Dacor Models	(A) Cabinet Cutout Width	(B) Min. Cabinet Width	(C) Cutout Height	(D) Min. Gap Between Cutouts
24 Inch wide models	22 1/2" (572 mm)	24 1/4" (616 mm)	9 1/8" (232 mm)	1 1/4" (32 mm)
27 Inch wide models	25 1/2" (648 mm)	27 1/4" (692 mm)		
30 Inch wide models	28 1/2" (724 mm)	30 1/4" (768 mm)		



NOTES:

1. 24" (610 mm) minimum interior cabinet depth.
2. 3/4" (19 mm) support platform (flush with cutout).
3. Spacing may vary for warming drawers with a custom front panel. See warming drawer installation instructions for further details.
4. See individual planning guide pages to determine overlays.
5. IWD, OWD and 36 Inch series models cannot be installed above or below another warming drawer (any type).
6. Spacing between appliances and doors/drawers is minimum required to allow for ventilation and to prevent scraping. Additional space may be required for appearance.