

# COMBINATION INSTALLATIONS




## Microwave/Warming Drawer/ DO, EORS, MORS, RO or ROV Wall Oven

## PLANNING GUIDE

All tolerances: +1/16" (+1.6 mm), -0, unless otherwise stated

### WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- All appliances must be installed in accordance with the accompanying installation instructions.

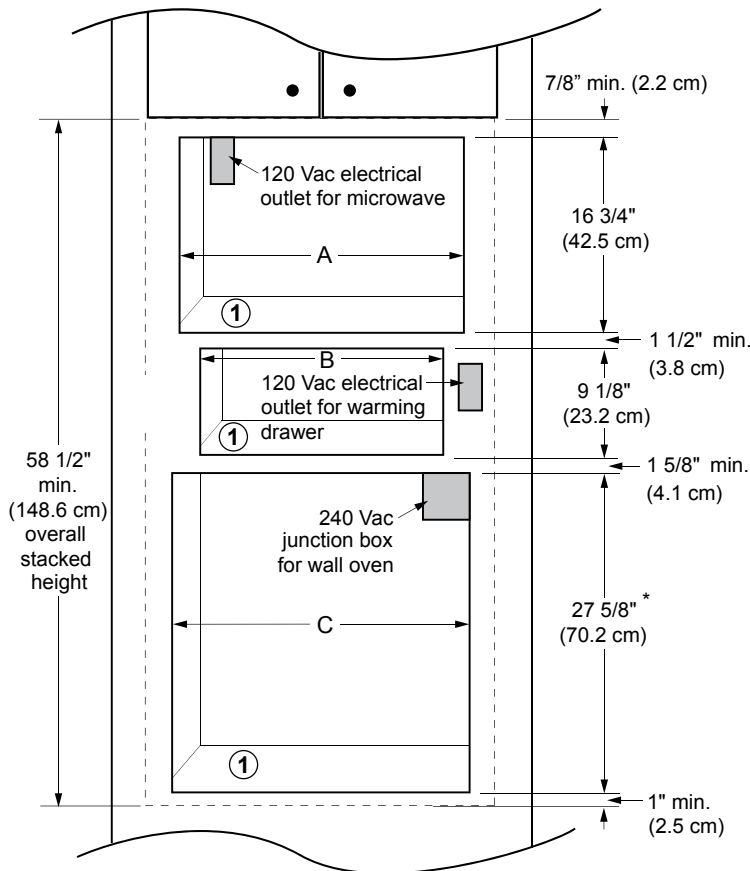


\*26 7/8" (68.3 cm) for RO series wall ovens

### CUTOUT DIMENSIONS DMT2420/DMW2420 SHOWN

#### NOTE:

1. 3/4" (1.9 cm) support platform (flush with cutout).
2. See individual appliance Planning Guide pages to determine overlays.
3. Spacing between appliances and drawers/doors shown is minimum required to allow for ventilation and prevent scuffing. Additional space may need to be added for appearance.
4. Warming drawer model OWD24 is not approved for installation above, below or adjacent to a wall oven or another warming drawer (any type).

Microwave Model No.	(A) Cutout Width
DMT2420 or DMW2420 w/AMTK series trim kit	24 3/8" (61.9 cm)
DCM24 w/ACTK27	25 1/4" (64.1 cm)
DCM24 w/ACTK30	28 1/4" (71.8 cm)
DCM24 w/ACTK36	25" (63.5 cm)

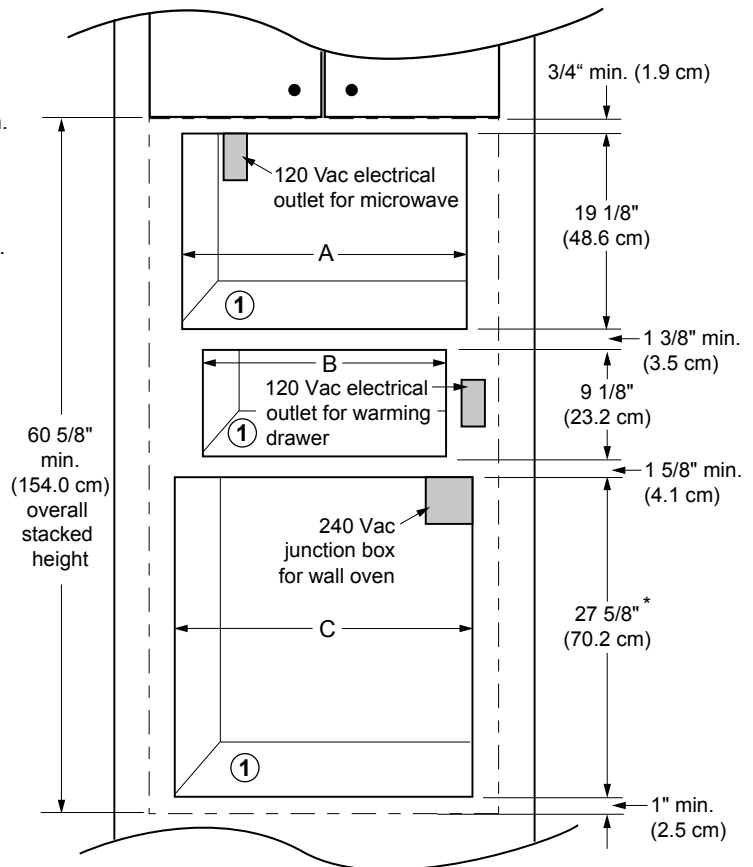

\*26 7/8" (68.3 cm) for RO series wall ovens

### CUTOUT DIMENSIONS DCM24 SHOWN

Warming Drawer Models	(B) Cutout Width
27"	25 1/2" (64.8 cm)
30"	28 1/2" (72.4 cm)

Wall Oven Models	(C) Cutout Width
Single 27"	25 1/2" (64.8 cm)
Single 30"	28 1/2" (72.4 cm)
Single 36"	34 1/2" (87.6 cm)